



FNT 2200-Design

Sauna control unit for Finnish sauna
and sauna with humidity

Key features:

- Elegant, high-quality glass touch control panel
- Simple, intuitive, language-neutral operation
- Low space requirement
- Low installation depth
- ECO Mode
- Display lighting signals heating status


Scope of delivery:

- 1 x control panel with touch display
- 1 x basic device / load unit
- 1 x 5m connection cable
- 1 x oven sensor in beige



Technical data sheet


Dimensions:

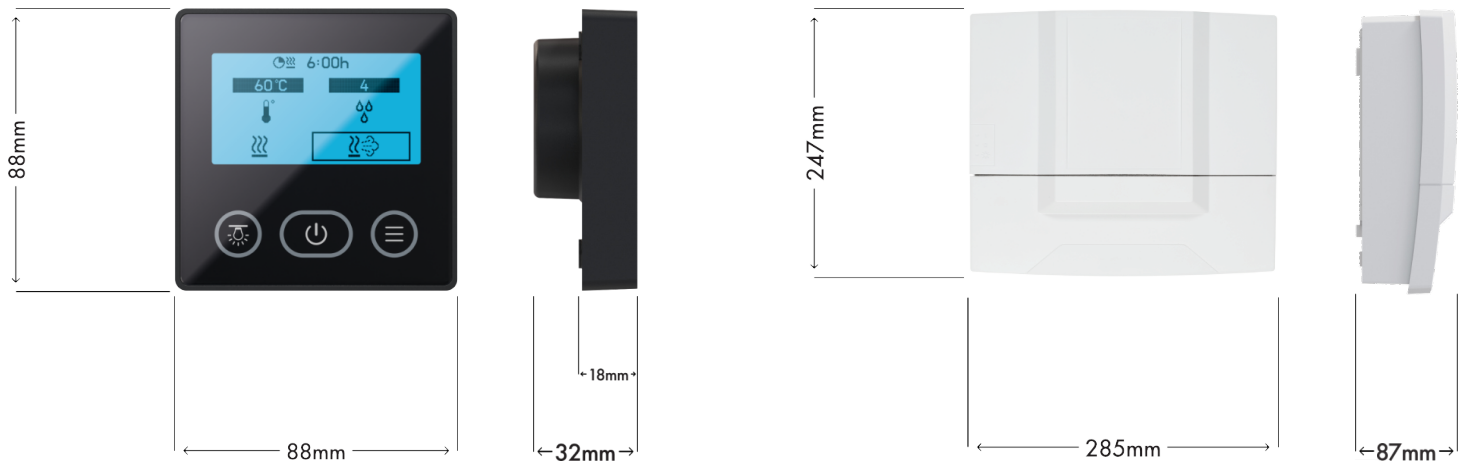

Sensors and device assembly:



Connection diagram:

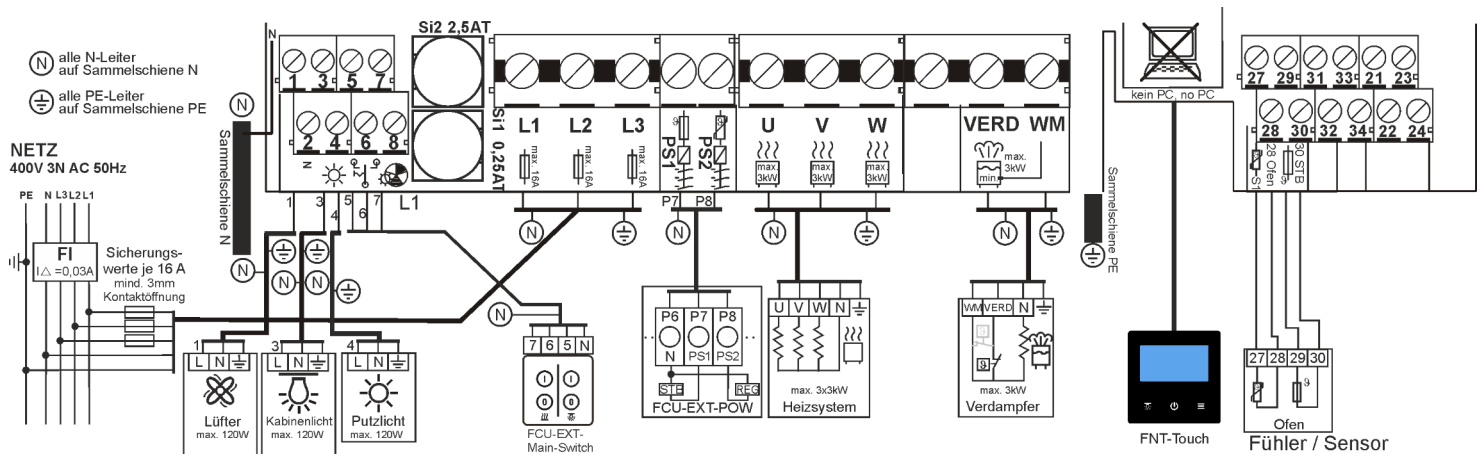

Accessories

Description
Switching load extension for 09kW / 18kW / 24kW
Oven sensor in black
Silicone cable 3m long, for the oven sensor in white and red
Silicone cable 100m ring 2x0.75 mm² in red
Silicone cable 100m ring 2x0.75 mm² in white
Protective coating on the circuit board, for increased corrosion protection in the event of condensation
Stand-alone music module with 2x10W output power
2x50W speakers incl. 5m connecting cable

Technical data

Item no.	Electrical connection	Switching capacity	Temperature range	Light connection	Fan connection	Heating time limit	Ambient Temperatures during operation	Weight with repacking
FNT2200-DESIGN	400V 3N ~ 50Hz	Oven: 9kW Evaporator: 3kW	Finnisch: 40-110°C Sauna with humidity: 30-65°C / level 1-9	Max. 120W (resistive, inductive load)	Max. 120W (resistive, inductive load)	6h (max. 20h)	0 bis +40°C	2,5 Kg

Technical changes reserved